



ELECTRIC PUMP

EL354



Technosub

60Hz

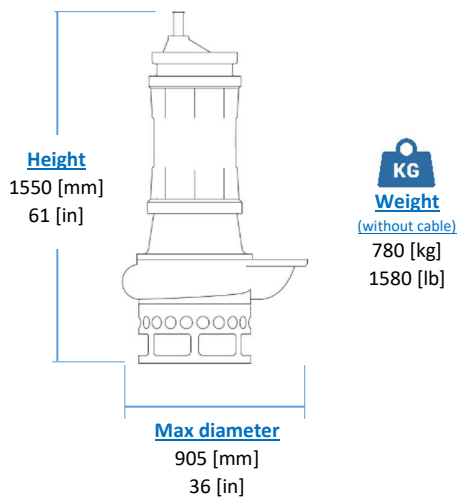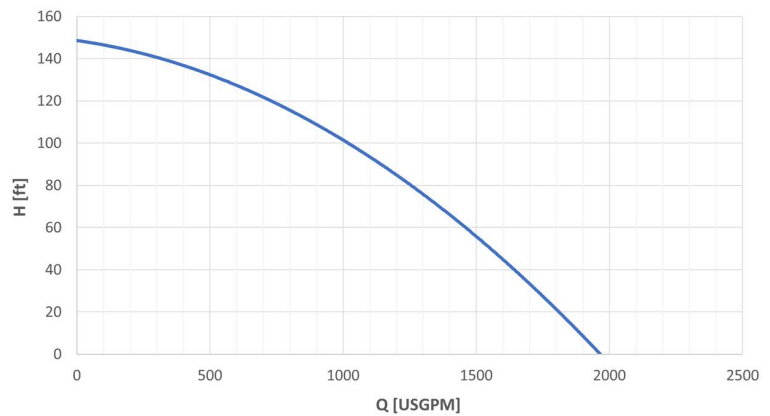

Electrical motor

| Insulation class H

Cable

| 1 x SHD-GC cable 15m (50ft)

Operating Conditions

- | Max liquid temperature 95 °F
- | Min Submersion depth 48.8 in

Model	EL354
Brake Power [kW HP]	37 49
Electric Power [kW HP]	40 53
Frequency [Hz]	60
Efficiency [%]	44%
Number of Poles	4
RPM	1758
Voltage [V]	575
Rated Current [A]	48
Solid handling [mm in]	35 1.4
Discharge (Victaulic) [mm in]	100 4"

Materials

Part	Standard
Casing	Cast Iron EN-GJS800
Body	Cast Iron EN-GIL250
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

Seals and lubricants

Version	EL354	MG	MS
Motor Side	LIPS	MECHANICAL	MECHANICAL
Impeller Side	LIPS	LIPS	MECHANICAL
Oil type	EP320	ISO32	ISO32