


# ELECTRIC PUMP EL1204HH



## Technosub

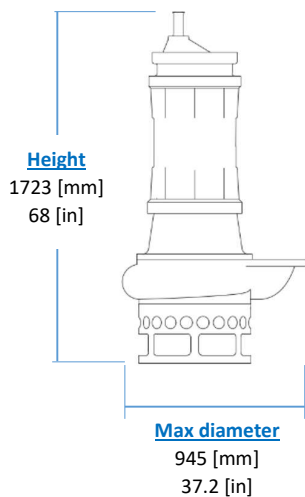

**KG**  
**Weight**  
(without cable)  
1250 [kg]  
2755 [lb]



### Electrical motor

Insulation class H



### Cable


1 x SHD-GC cable 15m (50ft)



### Operating Conditions

- Max liquid temperature 95 °F
- Min Submersion depth 59.4 in

60Hz

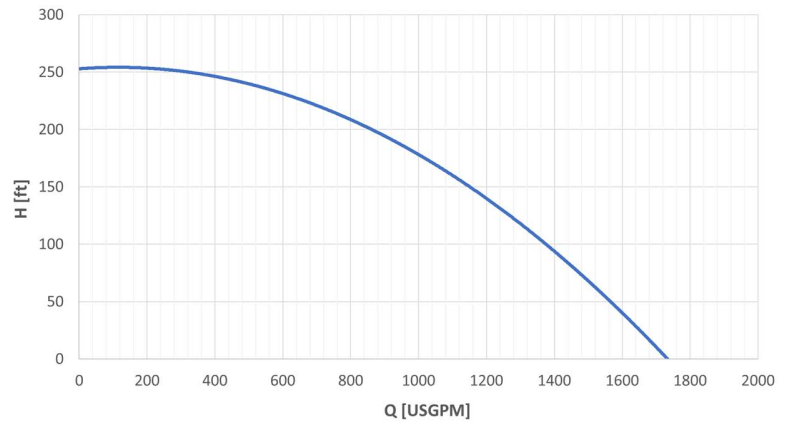

Model	EL1204HH
Brake Power [kW HP]	100   134
Electric Power [kW HP]	96   128
Frequency [Hz]	60
Efficiency [%]	45%
Number of Poles	4
RPM	1776
Voltage [V]	575
Rated Current [A]	112,8
Solid handling [mm in]	35   1.4
Discharge [ANSI]	150-10

### Materials

Part	Standard
Casing	Cast Iron EN-GJS800
Body	Cast Iron EN-GJL250
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

### Seals and lubricants

Version	-	MG	MS
Motor Side	-	MECHANICAL	MECHANICAL
Impeller Side	-	LIPS	MECHANICAL
Oil type	-	ISO32	ISO32